




# Okoguard® CIC URO-J Cable-In-Conduit

15 to 35kV Primary Underground Distribution Cable-Full Neutral  
One Aluminum Conductor/105°C Rating — 100% and 133% Insulation Level

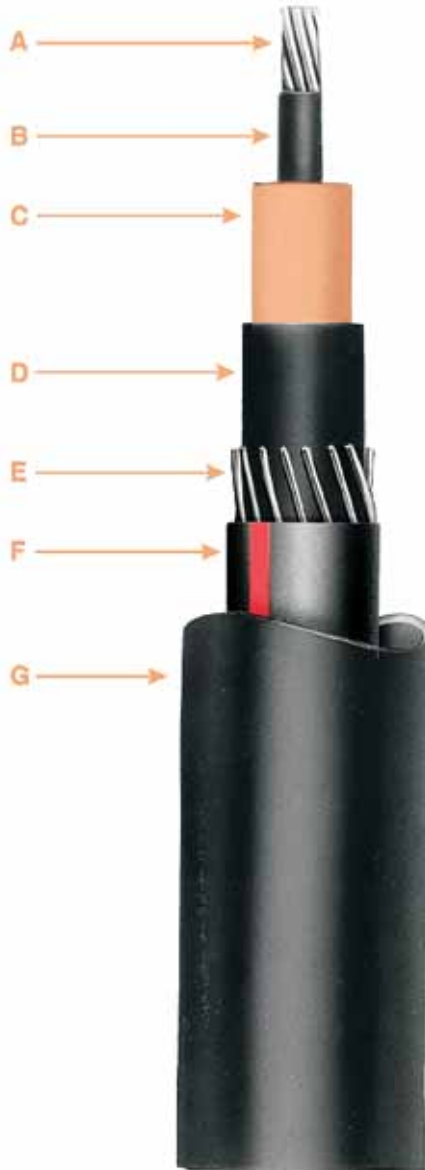

- A Conductor - Stranded Aluminum
- B Strand Screen - Extruded Semiconducting EPR
- C Insulation - Okoguard EPR
- D Insulation Screen - Extruded Semiconducting EPR
- E Concentric Wires - Bare Copper
- F Encapsulating Jacket - Okolene
- G Conduit - Flexible Polyethylene

### Insulation

Okoguard is Okonite's registered trade name for its exclusive ethylene-propylene rubber (EPR) based, thermosetting compound, whose optimum balance of electrical and physical properties is unequalled in other solid dielectrics. Okoguard insulation, with the distinctive red color and a totally integrated EPR system, provides the optimum balance of electrical and physical properties for long, problem free service.

The triple tandem extrusion of the screens with the insulation provides optimum electrical characteristics.

Okonite URO cables are factory installed within a polyethylene conduit. This URO-CIC (Cable-in-Conduit) has many of the advantages of a jacketed cable provided the ends of the conduit are sealed.

The bare copper concentric wires are uniformly spaced around the insulation screen and are sufficient in number to supply full conductivity of the power conductor. The flexible polyethylene conduit provides an economical factory assembled cable-in-conduit with mechanical protection against accidental dig-in, and easier installation.

### Applications

CIC cable with a full neutral provides reliable circuit security in underground distribution systems. They provide greater mechanical protection against accidental dig-in than the direct burial UD cables normally installed.

The Okolene® duct protects the cable in adverse soil conditions (stone, coarse backfill, corrosive soil conditions, etc.).

The Okoguard CIC cable is commonly installed where the ground above the cable will be finished with asphalt paving, landscaping, structures, etc.

URO-CIC is particularly advantageous when used in landscaped residential areas since system expansions may be accomplished without disturbing the lawn and shrubbery.

### Specifications

**Central Conductor:** Aluminum per ASTM B-609 Class B stranded per B-231.

**Conductor Screen:** Extruded semiconducting ethylene-propylene rubber meets or exceeds the requirements of ICEA S-94-649 and AEIC CS8.

**Insulation:** Extruded Okoguard meets or exceeds the requirements of ICEA S-94-649 and AEIC CS8.

**Insulation Screen:** Extruded semiconducting ethylene-propylene rubber meets or exceeds the requirements of ICEA S-94-649 and AEIC CS8.

**Concentric Conductor:** Bare copper wires. Conductivity equal to central conductor.

**Jacket:** Black Okolene with red extruded stripes and NESC lightning bolt meets or exceeds the requirements of ICEA S-94-649 for polyethylene jackets.

**Conduit:** Extruded high density polyethylene with standard wall thicknesses per NEMA TC7. HDPE material in accordance with ASTM D 3350; conduit dimensions in accordance with ASTM D 3484; conduit manufactured in accordance with ASTM F 2160. Optional Sch 40, 80, SDR 13.5 and SDR 11 conduit available on special orders.

### Product Features

- Triple tandem extruded, all EPR cable.
- Okoguard cables meet or exceed all recognized industry standards (UL, AEIC, ICEA, IEEE).
- Can be listed by UL as MV-90
- Can be CSA listed to C68.3
- 105°C continuous operating temperature
- 140°C emergency rating
- 250°C short circuit rating
- Excellent corona resistance.
- Screens are clean stripping.
- Exceptional resistance to "treeing".
- Outstanding impact strength and abrasion resistance.
- Additional protection against dig-in.
- Meets or exceeds requirements of applicable industry standards.
- Very low moisture absorption.
- Excellent resistance to weather and most chemicals.
- Easy to splice and terminate.
- Design Options:  
Filled strand  
Copper central conductor
- Improved Temperature Rating.  
Okoguard insulation system has been tested and qualified for operation at 105°C continuous and 140°C emergency operating temperature.
- Minimum installation temperature of -40°C.

# Okoguard CIC URO-J Cable-In-Conduit

## Product Data Section2: Sheet 38

**15 and 25kV Primary Underground Distribution Cable-Full Neutral**  
One Aluminum Conductor/105°C Rating — 100% and 133% Insulation Level

Catalog Number	Conductor Size AWG/kcmil	Number of Strands	Nominal Dia. Over Insulation	Nominal Dia. Over Insulation Screen	Copper Full Neutral Number x AWG (1)	Nominal O.D. Over Jacket	Okolene Conduit Nominal Size	Okolene Conduit O.D. (in.)	Approx. Net Weight lbs./1000	Approx. Ship Weight lbs./1000	90° Ampacity Duct (2)	105° Ampacity Duct (2)	Minimum Bending Radius (in.)
<b>Okoguard Insulation: 175 mils (4.45mm), 100% Insulation Level - 15kV</b>													
161-23-2110	2(7x)	0.67	0.75	10 x 14	0.98	1 ¼	1.66	751	1041	120	130	18	
161-23-2116	1(19x)	0.72	0.80	13 x 14	1.03	1 ½	1.90	890	1280	135	150	21	
161-23-2122	1/0(19x)	0.75	0.83	16 x 14	1.06	1 ½	1.90	970	1360	155	170	21	
161-23-2125	2/0(19x)	0.81	0.88	13 x 12	1.15	1 ½	1.90	1100	1490	175	200	21	
161-23-2128	3/0(19x)	0.86	0.93	16 x 12	1.20	2	2.38	1380	1940	200	225	26	
161-23-2131	4/0(19x)	0.91	0.99	13 x 10	1.30	2	2.38	1575	2265	230	260	26	
161-23-2134	250(37x)	0.97	1.04	16 x 10	1.36	2	2.38	1740	2430	255	285	26	
161-23-2140	350(37x)	1.07	1.17	20 x 10	1.58	2	2.38	2170	2860	300	340	26	
<b>Okoguard Insulation: 220 mils (5.59mm), 133% Insulation Level - 15kV</b>													
161-23-3110	2(7x)	0.77	0.84	10 x 14	1.09	1 ½	1.90	897	1287	120	130	21	
161-23-3116	1(19x)	0.81	0.89	13 x 14	1.13	1 ½	1.90	973	1363	135	150	21	
161-23-3122	1/0(19x)	0.84	0.92	16 x 14	1.17	1 ½	1.90	1053	1445	170	170	21	
161-23-3125	2/0(19x)	0.90	0.97	13 x 12	1.24	2	2.38	1351	2041	175	200	26	
161-23-3128	3/0(19x)	0.95	1.02	16 x 12	1.29	2	2.38	1475	2165	200	225	26	
161-23-3131	4/0(19x)	1.01	1.08	13 x 10	1.39	2	2.38	1678	2368	230	260	26	
161-23-3134	250(37x)	1.06	1.16	16 x 10	1.48	2	2.38	1877	2567	255	285	26	
161-23-3140	350(37x)	1.17	1.27	20 x 10	1.58	2 ½	2.88	2462	3362	300	340	32	
<b>Okoguard Insulation: 260 mils (6.60mm), 100% Insulation Level - 25kV</b>													
161-23-4116	1(19x)	0.90	0.97	13 x 14	1.21	2	2.38	1212	1902	135	150	26	
161-23-4122	1/0(19x)	0.92	1.00	16 x 14	1.23	2	2.38	1298	1985	150	170	26	
161-23-4125	2/0(19x)	0.98	1.05	13 x 12	1.33	2	2.38	1439	2129	175	200	26	
161-23-4128	3/0(19x)	1.03	1.13	16 x 12	1.40	2	2.38	1595	2285	200	225	26	
161-23-4131	4/0(19x)	1.07	1.17	13 x 10	1.50	2	2.38	1806	2496	225	260	26	
161-23-4134	250(37x)	1.14	1.24	16 x 10	1.56	2 ½	2.88	1980	2670	250	285	32	
161-23-4140	350(37x)	1.25	1.35	20 x 10	1.73	2 ½	2.88	2637	3537	300	345	32	
<b>Okoguard Insulation: 320 mils (8.76mm), 133% Insulation Level - 25kV</b>													
161-23-5116	1(19x)	1.02	1.12	13 x 14	1.36	2	2.38	1370	2060	135	150	26	
161-23-5122	1/0(19x)	1.06	1.16	16 x 14	1.40	2	2.38	1461	2151	150	170	26	
161-23-5125	2/0(19x)	1.10	1.20	13 x 12	1.47	2	2.38	1611	2301	175	200	26	
161-23-5128	3/0(19x)	1.15	1.25	16 x 12	1.52	2 ½	2.88	2036	3226	200	225	32	
161-23-5131	4/0(19x)	1.21	1.31	13 x 10	1.62	2 ½	2.88	2257	3447	225	260	32	
161-23-5134	250(37x)	1.27	1.37	16 x 10	1.74	2 ½	2.88	3387	4577	250	285	32	
161-23-5140	350(37x)	1.37	1.47	20 x 10	1.85	2 ½	2.88	2818	4008	300	345	32	

Visit Okonite's web site [www.okonite.com](http://www.okonite.com) for the most up to date dimensions.

(1) Individual wire size and count may vary. The resulting combination meets the full neutral size requirement.

#### Ampacities

(2) Ampacities for a full neutral single phase system based on conductor operating temperature of 90°C and 105°C, direct buried 36" deep, 20°C ambient temperature, thermal resistivity RHO-90, 100% load factor.

# Okoguard CIC URO-J Cable-In-Conduit

## Product Data Section 2: Sheet 38

**35kV Primary Underground Distribution Cable-full Neutral**  
One Aluminum Conductor/105°C Rating  
100% and 133% Insulation Level

Catalog Number	Conductor Size AWG/kcmil	Number of Strands	Nominal Dia. Over Insulation	Nominal Dia. Over Insulation Screen	Copper Full Neutral Number x AWG (1)	Nominal O.D. Over Jacket	Okolene Conduit Nominal Size	Okolene Conduit O.D. (In.)	Approx. Net Weight lbs./1000'	Approx. Ship Weight lbs./1000'	90° Ampacity Duct (2)	105°C Ampacity Duct (2)	Minimum Bending Radius (In.)
<b>Okoguard Insulation: 345 mils (8.76mm), 100% Insulation Level - 35kV</b>													
161-23-6122	1/0(19x)	1.10	1.20	16 x 14	1.44	2	2.38	1521	1951	150	175	26	
161-23-6125	2/0(19x)	1.15	1.25	13 x 12	1.52	2 ½	2.88	1966	3156	170	200	32	
161-23-6128	3/0(19x)	1.20	1.30	16 x 12	1.57	2 ½	2.88	2101	3291	200	230	32	
161-23-6131	4/0(19x)	1.26	1.36	13 x 10	1.74	2 ½	2.88	2391	3581	225	260	32	
161-23-6134	250(37x)	1.32	1.42	16 x 10	1.79	2 ½	2.88	2575	3765	245	290	32	

<b>Okoguard Insulation: 420 mils (10.7mm), 133% Insulation Level - 35kV</b>													
161-23-7122	1/0(19x)	1.26	1.36	16 x 14	1.60	2 ½	2.88	2013	3203	150	175	32	
161-23-7125	2/0(19x)	1.31	1.41	14 x 12	1.74	2 ½	2.88	2241	3431	170	200	32	
161-23-7128	3/0(19x)	1.36	1.46	16 x 12	1.79	2 ½	2.88	2386	3576	200	230	32	

Visit Okonite's web site [www.okonite.com](http://www.okonite.com) for the most up to date dimensions.

(1) Individual wire size and count may vary. The resulting combination meets the full neutral size requirement.

#### Ampacities

(2) Ampacities for a full neutral single phase system based on conductor operating temperature of 90°C and 105°C, direct buried 36" deep, 20°C ambient temperature, thermal resistivity RHO-90, 100% load factor.

Conduit Specs			
Nominal Size (in.)	Average OD (in.)	Standard Wall (in.)	
		Min Wall	Ave. ID
1-1/4	1.660	0.100	1.440
1-1/2	1.900	0.115	1.650
2	2.375	0.145	2.065
2-1/2	2.875	0.203	2.445
3	3.500	0.216	3.042

