

Okotherm® CIC Fire Resistant Cable



600V Control Cable—Type MC-HL C-L-X, Aluminum Sheath

Multiple Nickel Coated Copper Conductors, 90°C Wet or Dry Rating

600/1000V Marine Shipboard Cable

For Cable Tray Use - Sunlight Resistant - For Direct Burial

Cable Description

Nickel coated copper conductors, Okotherm CIC fire resistant thermoset silicone insulation, with FR tape if required, color or number coded fiber glass braid, cabled conductors, nickel coated ground conductor (same size as control conductor), cable tape, aluminum CLX sheath, Okoseal (PVC) jacket.

Conductors: Nickel Coated Copper

Insulation: Okotherm Thermoset Silicone, with FR tape if required.

Braid: Fiberglass braid, coated with lacquer.

Color Code: Cables up to and included 7 conductors are Method 3, Table E-2 (print number and color) and cables greater than 7 conductors are Method 4 (print number) per ICEA S-73-532, Appendix E.

Grounding Conductor: Nickel coated copper, same size as insulated conductors.

Armor: Continuously corrugated and welded aluminum (C-L-X).

Outer Jacket: Black Okoseal PVC.

Industry Standards:

These cables are manufactured and tested in compliance with UL 1569, UL 2225, UL 1309, ICEA S-95-658 (NEMA WC70), ICEA S-73-532 (NEMA WC 57), and ASTM B-355, and are qualified to flame test requirements including IEC 60331, ICEA T-29-520, and IEEE 1202.


Applications

Okotherm CIC 600 Volt Power Cables are designed for use in systems where circuit integrity must be maintained during a fire to ensure process continuity or safe shutdown. Fire resistance is qualified to IEC 60331, with circuit integrity maintained at temperatures up to 2000°F for three hours. During fire exposure, the insulation forms a ceramic-like ash that remains electrically insulating and capable of supporting the operating voltage. Okotherm CIC CLX Type MC-HL cables, constructed with an impervious corrugated aluminum sheath, provide a robust alternative to conduit systems. They are approved for installation indoors or outdoors, in wet or dry locations, in open runs on supports up to six feet apart, in cable tray, on messenger-supported aerial runs, in raceways, direct burial, or concrete encasement.

These cables are also rated for Class I & II, Division 1 and 2, Class III, Division 1 and 2, and Class I, Zones 1 & 2 hazardous locations per NEC Articles 501, 502, 503, and 505. Okotherm CIC CLX Type MC-HL control cables are further authorized for use on services, feeders and branch circuits for power, lighting, control and signaling in accordance with NEC Articles 330 and 725.

Product Features

- UL Listed as Type MC-HL (E38916) and Marine Shipboard Cable (E137931).
- Approved for cable tray use, direct burial (2/C #14 AWG and larger), and sunlight resistant.
- Flame tested: IEEE 383-1974, IEEE 1202, and ICEA T-29-520 (210,000 BTU).
- Factory-assembled, pre-tested wiring system with color coding.
- ABS Type approved.
- Operating temperature: 90°C continuous, 130°C emergency, 250°C short circuit.
- Impervious corrugated aluminum sheath blocks moisture, gases, and liquids.
- Provides excellent EMI shielding, grounding safety, and mechanical strength (compression/impact).
- Reduced sealing fitting requirements in Class I, Div. 2 and Zone 2 hazardous locations (NEC 501.15(E)(3), 505.16(C)(2)(c)).
- Lower installed system cost compared to conduit or EMT systems.
- Supplied in continuous long lengths; minimum installation temperature -40°C/F.
- Optional LSZH jacket available.
- Fire resistant - qualified to IEC 60331-11 & -21, including circuit integrity up to 2000°F for 3 hours.
- Fire resistant - qualified to the Hydrocarbon Pool Circuit Integrity Fire Test (UL 1709 time-temperature curve), with minimum requirements of 65,000 BTU/h-ft² heat flux, 2000°F flame temperature, 30-minute test duration, and 15A load.

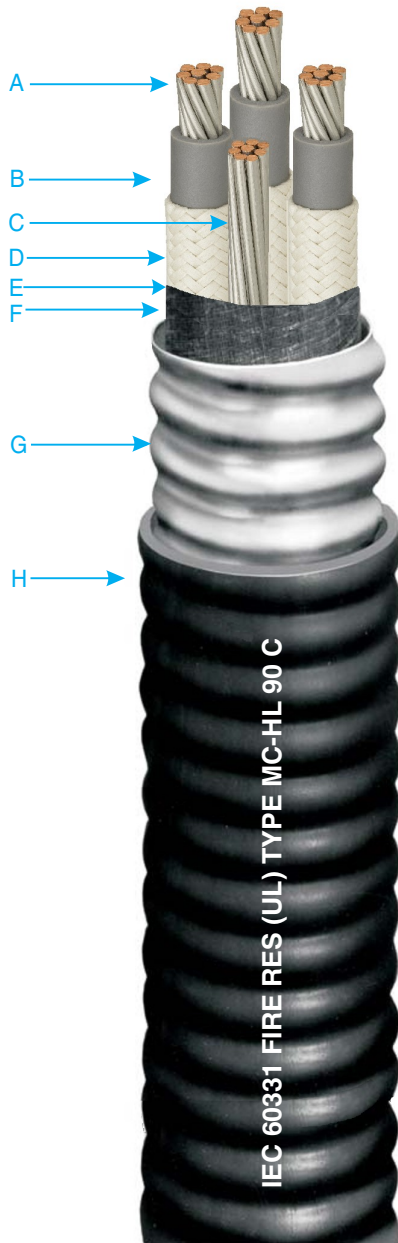

- A Nickel Coated Copper Conductors
- B Okotherm (Silicone) Thermoset Insulation
- C Nickel Coated Ground Conductor
- D Fiberglass Braid - Coded per ICEA
- E Glass Fillers
- F Cable Tape
- G Impervious, Continuous, Corrugated, Aluminum C-L-X Sheath
- H Black Okoseal Jacket

Okotherm CIC Fire Resistant Cable

600V Control Cable—Type MC-HL C-L-X, Aluminum Sheath

Multiple Nickel Coated Copper Conductors, 90°C Wet or Dry Rating

600/1000V Marine Shipboard Cable

For Cable Tray Use - Sunlight Resistant - For Direct Burial

Product Data Section 4: Sheet 19

Catalog Number	Conductor Size AWG	Number of Conductors	Insulation Thickness - mils	Core O.D. - Inches	C-L-X O.D. - Inches	Jacket Thickness - mils	Approx. O.D. - Inches	Cross-Sectional Area (sq. in.) [†]	Approx. Net Weight lbs./1000'	Approx. Ship Weight lbs./1000'	90°C Wet or Dry NEC Ampacity (1)*	75°C Wet NEC Ampacity*
NICKEL COPPER, IEC Rating: 2000°F for 3 hours												
546-15-3402	14 (7X)	2	0.43	0.62	50	0.73	0.42	243	340	15	15	
546-15-3403	14 (7X)	3	0.46	0.67	50	0.78	0.48	276	383	15	15	
546-15-3404	14 (7X)	4	0.52	0.71	50	0.82	0.58	331	447	15	15	
546-15-3405	14 (7X)	5	0.58	0.75	50	0.86	0.65	352	500	15	15	
546-15-3407	14 (7X)	7	0.64	0.84	50	0.95	0.79	460	595	15	14	
546-15-3409	14 (7X)	9	0.83	1.02	50	1.13	1.17	656	876	15	14	
546-15-3412	14 (7X)	12	0.94	1.15	50	1.26	1.33	807	1046	12	10	
546-15-3419	14 (7X)	19	1.13	1.34	50	1.48	1.83	1109	1457	12	10	
546-15-3437	14 (7X)	37	1.55	1.74	60	1.87	3.03	1880	2721	10	8	
546-15-3502	12 (7X)	2	0.47	0.67	50	0.78	0.48	320	385	20	20	
546-15-3503	12 (7X)	3	0.50	0.71	50	0.82	0.53	367	439	20	20	
546-15-3504	12 (7X)	4	0.56	0.75	50	0.83	0.65	431	517	20	20	
546-15-3505	12 (7X)	5	0.70	0.84	50	0.95	0.85	531	674	20	20	
546-15-3507	12 (7X)	7	0.77	0.97	50	1.08	1.00	690	797	20	17	
546-15-3509	12 (7X)	9	0.91	1.11	50	1.22	1.25	886	1028	20	17	
546-15-3512	12 (7X)	12	1.02	1.24	50	1.35	1.54	1101	1250	15	12	
546-15-3519	12 (7X)	19	1.23	1.47	60	1.58	2.14	1559	1787	15	12	
546-15-3537	12 (7X)	37	1.69	1.96	60	2.09	3.77	2892	3341	12	10	
546-15-3602	10 (7X)	2	0.51	0.71	50	0.82	0.58	396	456	30	30	
546-15-3603	10 (7X)	3	0.55	0.75	50	0.86	0.65	448	527	30	30	
546-15-3604	10 (7X)	4	0.69	0.84	50	0.95	0.85	559	700	30	28	
546-15-3605	10 (7X)	5	0.76	0.93	50	1.04	1.00	674	815	30	28	
546-15-3607	10 (7X)	7	0.84	1.06	50	1.17	1.17	879	1001	28	24	
546-15-3609	10 (7X)	9	0.99	1.24	50	1.35	1.54	1136	1265	28	24	
546-15-3612	10 (7X)	12	1.12	1.37	50	1.48	1.84	1417	1585	28	17	

NOTE: All cables include one nickel coated ground conductor that is the same size as the control conductors.

Okonite's web site, www.okonite.com contains the most up to date information.

† **Cross-sectional** area for calculation of cable tray fill in accordance with NEC Section 392.22.

(1) Ampacities

Ampacities are based on 310.16 of the National Electrical Code for conductors rated 90°C, in a multi-conductor cable, at an ambient temperature of 30°C (86°F). The 75°C column is provided for additional information.

The ampacities shown apply to open runs of cable, installation in any approved raceway, direct burial in the earth, or as aerial cable on a messenger. Derating for more than three current

carrying conductors within the cable is in accordance with NEC Section 310.15(C)(1).

The ampacities shown also apply to cables installed in cable tray in accordance with NEC Section 392.80.

*Current limited to 15, 20 and 30 amps per Section 240.4(D) of the NEC for #14, #12 and #10 AWG, respectively.